


## Mounting Instructions

### Fixed Universal Screen Bracket 052.1000 / 052.2000 / 052.6000

#### 1 Mounting screen profiles



Mount the screen profiles to the back of the screen. Divide the profiles as well as possible.



2x




\* use M4, M5, M6 or M8 mounting material (depending on flat screen) (spacers only if necessary)



top flat screen


#### 2 Ensure there is a minimum distance of least at least 1.5 m between the wall and one side of the mounting plate, to install the locking bar at step 4. Mounting back plate

A

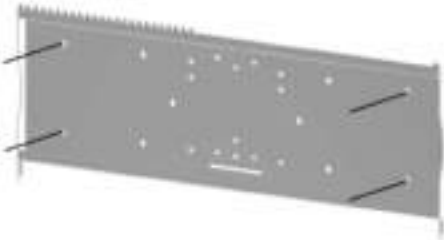


Mounting back plate to the wall

B

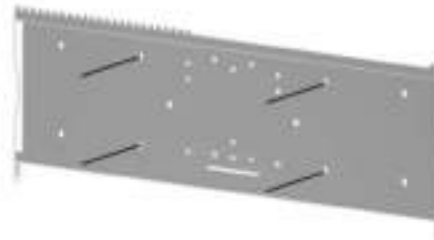


Mounting back plate to the wall (alternative mounting positions)

C

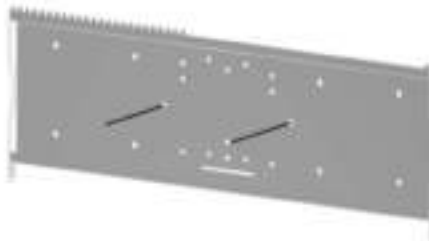

Mounting back plate to truss

D

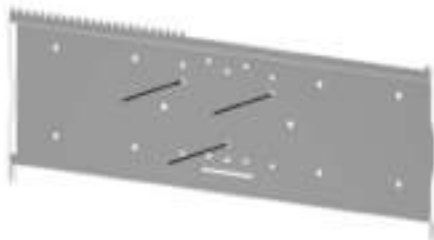

Mounting back plate to flat screen stand

## Mounting Instructions


### Fixed Universal Screen Bracket 052.1000 / 052.2000 / 052.6000

#### 3 Connecting flat screen to base plate



Hook on connecting profiles to the back plate

#### 4 Transit locking bar

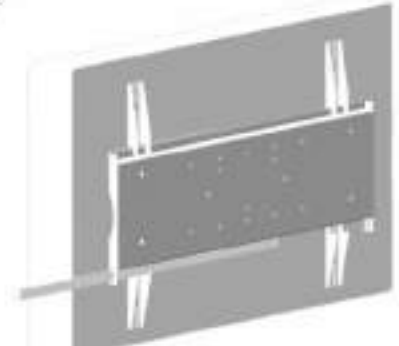

Transit the locking bar through the 'cheeks' of the back plate.

#### 5 Lock (optional)

